

## Check Valve

These spring-loaded, non-return, valves provide free flow in one direction but prevent flow in opposite direction, can be installed in any orientation.

### Technical Data

**Pressure rating:** 20.5 bar (300 psi)

**Standard materials:**

**Body:** Brass

**Spring:** Stainless steel 302

**Internals:** Brass

**Seal:** NBR

**Optional materials:**

**Metal parts:** Stainless steel 316


**Seals:** FPM

**Ports:**

1/4", 3/8" & 1/2" NPT

3/4", 1" & 1 1/2" BSP

**Maximum temperature:** 80°C (180°F)

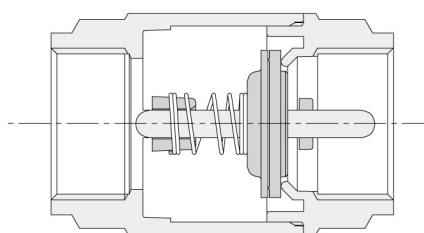



Trädgårdsteknik AB  
Helsingborgsvägen 578  
262 96 ÄNGELHOLM  
Telefon: 0431-222 90  
Telefax: 0431-222 70  
[info@tradgardsteknik.se](mailto:info@tradgardsteknik.se)  
[www.tradgardsteknik.se](http://www.tradgardsteknik.se)